

# KD



## GD50 嵌入式防眩光洗墙灯

- 50mm宽度的线性嵌入式洗墙灯，适合理地洗墙，天花洗墙等应用
- 灯具内置GLARE-FREE多角度防眩光格栅配件，提供多角度眩光防护
- 低SDCM高亮度LED光源，高色温一致性
- 48粒紧密排列光源，灯具紧贴装饰面安装且不会出现光斑
- 小巧的灯体最大支持36W功率散热，配备预埋件和隐蔽走线槽
- 地面安装时，可以实现人员距离灯具最近0.5米无眩光
- 分体密封防水模块可以保证灯具在极限情况下最大限度稳定工作





项目名称：四川成都伊甸岛公园

灯光顾问：ART LUCI LIGHTING

图片仅做照明产品效果展示，图片包含其他品牌商的产品


# GD50

## 嵌入式防眩光洗墙灯


SPECIFICATION / 规格参数

GD50 嵌入式防眩光洗墙灯 / GD50 RECESSIVE WALL WASHER																
Dimension 尺寸	505mm*50mm*60mm			505mm*50mm*60mm			985mm*50mm*60mm			985mm*50mm*60mm			985mm*50mm*60mm			
Work Voltage 工作电压	DC24			DC24			DC24			DC24			DC24			
Power 功率	12			18			24			24			24			
Color CT 色温	2700K / 3000K / 3500K / 4000K / 4500K / 5000K / RGBW / 2700-6000K															
LED QTY 光源数量	24			24			48			48			48			
R9	>10			>10			>10			>10			>10			
SDCM	<3			<3			<3			<3			<3			
CRI 显色指数	90			90			90			-			-			
Lumen output 流明	840			840			1680			1680			1680			
Work temperature 工作温度	<80°C			<80°C			<80°C			<80°C			<80°C			
Installation 安装方式	Recessed mount 嵌入安装			Recessed mount 嵌入安装			Recessed mount 嵌入安装			Recessed mount 嵌入安装			Recessed mount 嵌入安装			
Fixture material 材质	PC & Aluminum & Tempered glass			PC & Aluminum & Tempered glass			PC & Aluminum & Tempered glass			PC & Aluminum & Tempered glass			PC & Aluminum & Tempered glass			
IP rate 防水等级	IP67			IP67			IP67			IP67			IP67			
Light Control Protocol 控制方式	DMX	o	o	o	o	o	o	o	o	o	o	o	o	o	8 pixels/m	
	PWM	o	o	o	o	o	o	o	o	o	o	o	o	o	1 pixel/m	
	DALI	o	o	o	o	o	o	o	o	o	o	o	o	o	-	
Beam Angle 光学角度	15	30	20*60	15	30	20*60	15	30	20*60	15	30	20*60	15	30	20*60	
Beam Height 洗墙高度	Classic 正常高度	2m	1.5m	1.0m	2.5m	2m	1.5m	3.5m	3m	2.5m	1.9m	1.75m	1.5m	1.9m	1.75m	1.5m
	Max 最大高度	4m	3m	2m	4.5m	3.5m	2.5m	5.5m	4.5m	3.5m	2.5m	2.8m	2m	2.5m	2.8m	2m
Accessory 配件	Louwer 防眩格栅	3Ways louwer 3向防眩格栅			3Ways louwer 3向防眩格栅			3Ways louwer 3向防眩格栅			3Ways louwer 3向防眩格栅			3Ways louwer 3向防眩格栅		
	Bracket 支架	Non-adjustable wiring slot 不可调角度走线槽			Non-adjustable wiring slot 不可调角度走线槽			Non-adjustable wiring slot 不可调角度走线槽			Non-adjustable wiring slot 不可调角度走线槽			Non-adjustable wiring slot 不可调角度走线槽		

LIGHT PARAMETERS / 光学参数

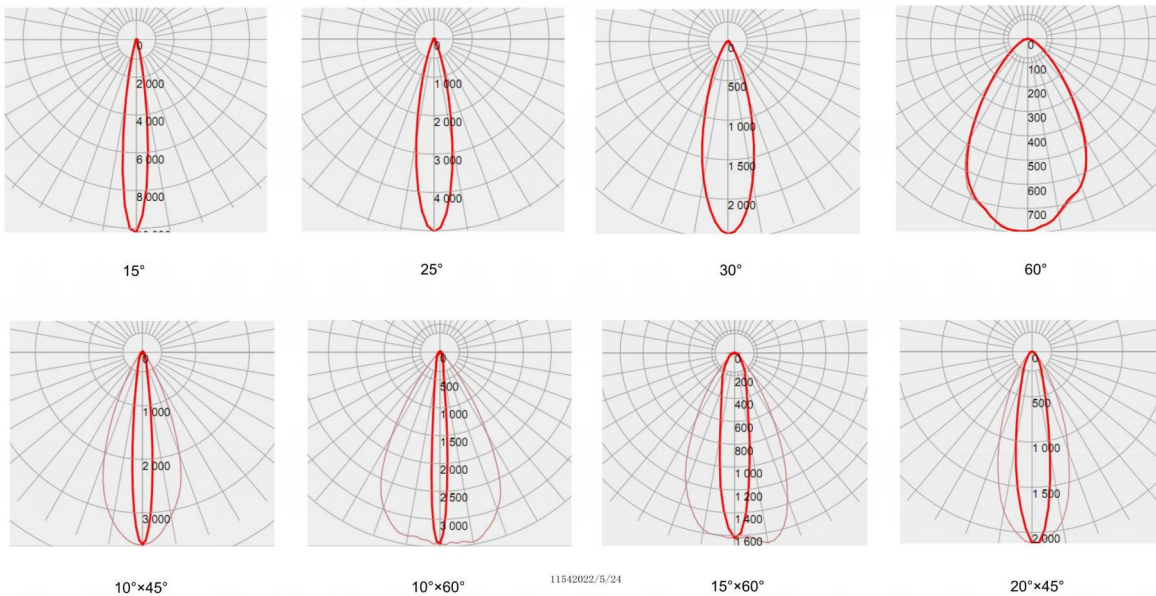

DIMENSION / 尺寸规格

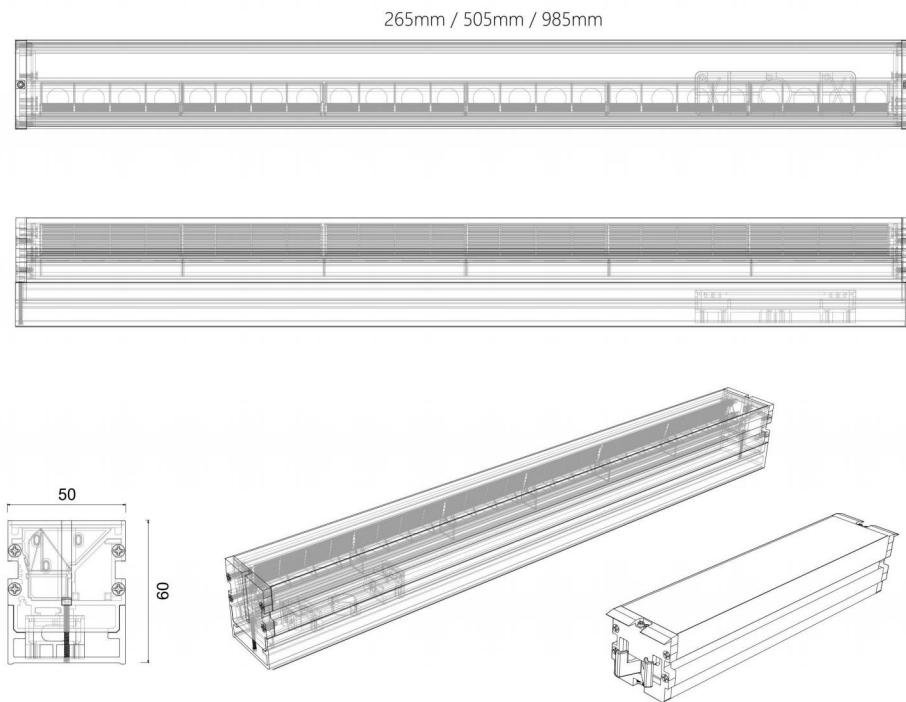

INSTALLATION / 安装

